


OFS 2000™ Emissions / Air Flow Sensor



OSI's patented Optical Flow Sensor (OFS) makes drift-free measurements across the entire stack, duct or pipe diameter and calculates an accurate average flow reading. It is the only flow sensor that gives a true non-contacting cross-stack flow measurement of the process. The OFS uses our EPA Method 14 approved optical scintillation technology. The optical scintillation technique relies on advanced Digital Signal Processing (DSP) electronics to "see" and measure the movement of turbulence found in a gaseous flow stream to provide highly accurate, path-averaged air velocity measurements. The accuracy of the OFS has been proven both in NIST's wind tunnel and in numerous real-world installations.

OFS-2000™ Advantages

- Cross stack/duct/pipe line measurement for more accurate flow readings.
- Measurement path 90° to stack; second platform not required – save \$100K or more.
- Easily replaces existing ultrasonic sensors.
- Non-interfering; nothing in flow path.
- Easy installation and optical alignment.
- Minimal upstream/downstream diameters; typically 2 & 1, not 20 & 10 like others.
- Long-term reliability: no blowers or moving parts; operates unattended - 24 / 7 / 365.
- Ultra low maintenance design.
- Rugged; designed for harsh environments
- Built in continuous self-test diagnostics.
- Measurement unaffected by path length & media pressure, moisture & opacity.
- No flow media high temperature limits.
- Compliant with EPA 40CFR Parts 60 & 75.
- Wide versatility, NIST tested and unbeatable combination of advanced technology, high performance and proven reliability!

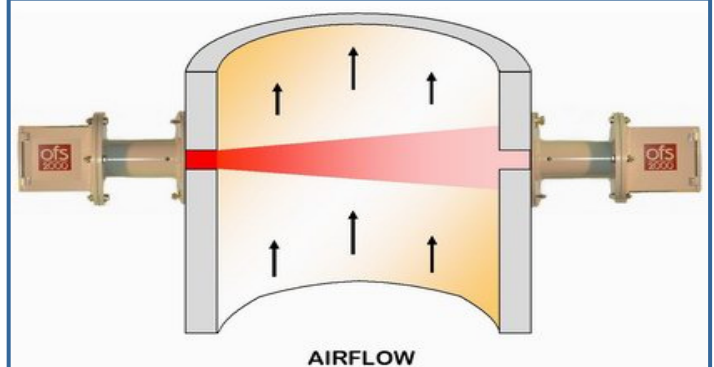

OFS-2000™ Options:

- Order **Z-Purge Option** for Class I Div. I & II applications.
- Standard control unit is rack mount; for wall mount order **1910-301, NEMA 4 Option**
- For custom receiver cable length, order **1910-216-nnn** where "nnn" is cable length in feet (max 300)

OFS-2000™ Accessories:

- **1910-431-nn** Sight Glass w/ gaskets for media isolation (2 required, multiple models)
- **1910-420** Cast Iron Gate Valves for high temperature applications (2 required)
- **1910-804** Laptop DB9 Serial communications cable

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06

Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Россия (495)268-04-70

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Казахстан (772)734-952-31

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

<https://osi.nt-rt.ru/> || ofs@nt-rt.ru

The OFS consists of DSP / multiprocessor- based control unit teamed with a set of optical transmit and receive heads which are easily installed on opposite sides of a stack, duct, vent or pipe. The OFS heads mount fully outside of the media volume behind optical windows for easy access more accurate measurements and greater durability. The transmit head sends a visible diverging light beam (easy to align and vibration resistant) directly across and perpendicular to the flow (although existing angled-path port can be used). The Control unit processes the fluctuations seen by the receive head, displays the flow data locally and transmits the data to a PC, PLC, DAS or other data collection device that accepts a serial data link and/or a 4-20 mA current loop. The control unit can be configured from either the local keypad and display, or from a laptop or portable terminal.

Rack mount (standard)
NEMA 4 (optional)
Control Units shown



OFS-2000™ Specifications

>>>

Flow Performance	
Measurement Technique	Optical Scintillation (OSi Patented)
Dynamic Range	0.1 to 40 m/sec
Accuracy (absolute)	+/- 0.1 m/sec basic -or- +/- 2% of reading, whichever is greater
Repeatability (relative)	+/- 0.1 m/sec basic -or- +/- 1% of reading, whichever is greater
Long Term Drift	Less than 1% per year
Time Constant(s)	Response 0.3 sec., Update: 3 sec., Averaging (selectable): 3 to 600 sec.
Automatic Calibration	2 or 3 point; user selectable interval -or- on external command
Sensor Health Monitoring	Continuous self-test of voltages, performance, optics, etc.
Media / Environmental	
Stack / Duct / Pipe Diameter	0.3 to 10 m, standard -- consult factory for other ranges
Media Temperature / Pressure / Humidity	No effect on measurement
Media Transparency	Up to 95% opacity (OFS-2000-W is recommended for high opacity)
Ambient Temperature / Humidity	-50 to 60 C (-58 to 140 F) / 0 - 100% condensing
Physical Specifications	
Light Source	Eye-safe 670 nm visible red LED, 5 deg. divergence angle
Sensor Heads (w/ 4" sch.40 flange extender)	9 x 9 x 13 inches, 13 lbs. -- NEMA4 weather resistant
Control Unit: Rack Mount Version (standard) NEMA4 Wall Mount (optional)	5 x 17 x 20 inches, 13 lbs. (for indoor use) -or- 12 x 16 x 10 inches, 15 lbs. (for outdoor / factory floor use)
Purge Air for Heads	Normally not needed. 1-2 CFM max for some very dirty applications
Electrical Specification	
User Interface	RS-232 serial I/O and / or 4-20 mA optically isolated current loop; Also two sets of relay contacts for fault and calibration indication.
Power for Transmit Head	Universal 100-240 VAC, 50/60 Hz, 12 VA (fused & surge protection)
Power for Control Unit	Universal 100-240 VAC, 50/60 Hz, 40 VA (fused & surge protection)
Cable between Control Unit & Receive Head	15 foot standard; to 300 foot optional (shielded, 10 cond., 22 AWG)

[Specifications are subject to change without notice.]

Архангельск (8182)63-90-72
 Астана (7172)727-132
 Астрахань (8512)99-46-04
 Барнаул (3852)73-04-60
 Белгород (4722)40-23-64
 Брянск (4832)59-03-52
 Владивосток (423)249-28-31
 Волгоград (844)278-03-48
 Вологда (8172)26-41-59
 Воронеж (473)204-51-73
 Екатеринбург (343)384-55-89
 Иваново (4932)77-34-06

Ижевск (3412)26-03-58
 Иркутск (395)279-98-46
 Казань (843)206-01-48
 Калининград (4012)72-03-81
 Калуга (4842)92-23-67
 Кемерово (3842)65-04-62
 Киров (8332)68-02-04
 Краснодар (861)203-40-90
 Красноярск (391)204-63-61
 Курск (4712)77-13-04
 Липецк (4742)52-20-81

Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13
 Москва (495)268-04-70
 Мурманск (8152)59-64-93
 Набережные Челны (8552)20-53-41
 Нижний Новгород (831)429-08-12
 Новокузнецк (3843)20-46-81
 Новосибирск (383)227-86-73
 Омск (3812)21-46-40
 Орел (4862)44-53-42
 Оренбург (3532)37-68-04
 Пенза (8412)22-31-16

Россия (495)268-04-70

Пермь (342)205-81-47
 Ростов-на-Дону (863)308-18-15
 Рязань (4912)46-61-64
 Самара (846)206-03-16
 Санкт-Петербург (812)309-46-40
 Саратов (845)249-38-78
 Севастополь (8692)22-31-93
 Симферополь (3652)67-13-56
 Смоленск (4812)29-41-54
 Сочи (862)225-72-31
 Ставрополь (8652)20-65-13

Казахстан (772)734-952-31

Сургут (3462)77-98-35
 Тверь (4822)63-31-35
 Томск (3822)98-41-53
 Тула (4872)74-02-29
 Тюмень (3452)66-21-18
 Ульяновск (8422)24-23-59
 Уфа (347)229-48-12
 Хабаровск (4212)92-98-04
 Челябинск (351)202-03-61
 Череповец (8202)49-02-64
 Ярославль (4852)69-52-93

<https://osi.nt-rt.ru/> || ofs@nt-rt.ru